

Series  
**AF**


**6,30 faston tags terminal blocks  
for PCB mounting**

Issue :  
Jul 28th, 2016


Page  
**1/1**




NOTES : N → nb of contacts  
P → Pitch

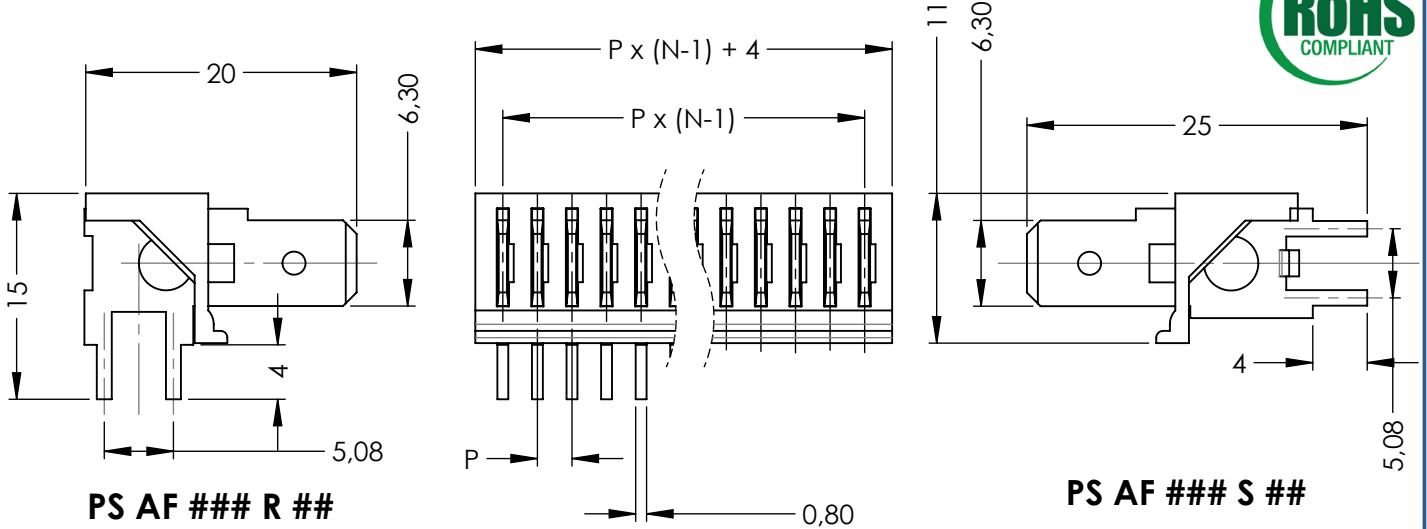


PC GRID PATTERN :  $\varnothing 1,40$  min.



PS AF 254 R 05




PS AF 508 S 13

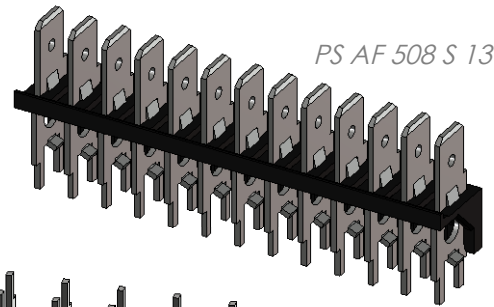

**MATERIALS & FINISHES :**

- Insulating body : Thermoplastic UL 94 V0
- Contacts : brass, pur tin plated



PS AF 762 R 6

**TECHNICAL CHARACTERISTICS :**

- Nominal voltage : 300 V
- Nominal current : 25 A

**HOW TO ORDER :**

PS AF ### # ##

- 254 → Pitch 2.54
- 508 → Pitch 5.08
- 762 → Pitch 7.62

Number of contact  
01 to 25 with 2.54 pitch  
01 to 13 with 5.08 pitch  
01 to 09 with 7.62 pitch

R → Right angle PC tail contacts  
S → Straight PC tail contacts

DIMENSIONS : mm [inch are given for information only]



**CREATION**

PROJET :  
NAME : CHEVREAU M.  
DATE : Jul 13th, 2016  
APPR : VAN DER MEE M.

Jul 28th, 2016	Mistake : P x N+4 → P x (N-1) + 4	CHEVREAU M.	VAN DER MEE M.	
Issue	Revisions	Name	Approved	

This document is the property of PASMAn, It cannot be reproduced or communicated to a third party without a prior written permission.

[www.pasman.fr](http://www.pasman.fr)

This information is given as an indication in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.